Smart 216 & Smart 232

Multi-user KVM switch for rack environments

- Two simultaneous KVM users
- BIOS level access and control of up to 16/32 servers/computers
- Multi-platform support (PS/2 & USB)
- Innovative Minicom KVM over CAT5 technology
- Extends distance between servers and switch up to 30m/100ft
- Space saving – sleek, 1U rack mountable
- Seamless power control
- 3 year warranty

Multi-user access and control of many computers

The Smart 216 and Smart 232 are high-performance KVM switches enabling multi-user access, control and management of multiple computers. They allow two users to control up to 16 or 32 mixed-platform (PS/2 & USB) servers. They also provide seamless power control via Minicom's Serial Remote Power Switch (RPS).

Straightforward set up

Easy installation via user friendly OSD.

Space saving devices that eliminate cable clutter

Physically the Smart 216 and Smart 232 are thin 1U sized, rack-mountable devices that save critical space in crowded server room environments. They feature Minicom KVM over CAT5 technology that directly connects the switch to each computer in the server room via a Ricc/Roc, eliminating cable clutter and extending the distance between server and switch up to 30m/100ft.

From server rooms to data centers

Thanks to their advanced functionality the Smart 216 and Smart 232 overcome many of the challenges facing today's crowded server rooms and data centers. They are the ideal solution for corporate server rooms requiring both a powerful and versatile KVM solution.

MINICOM
advanced systems

SMART 216/232 – TYPICAL APPLICATION

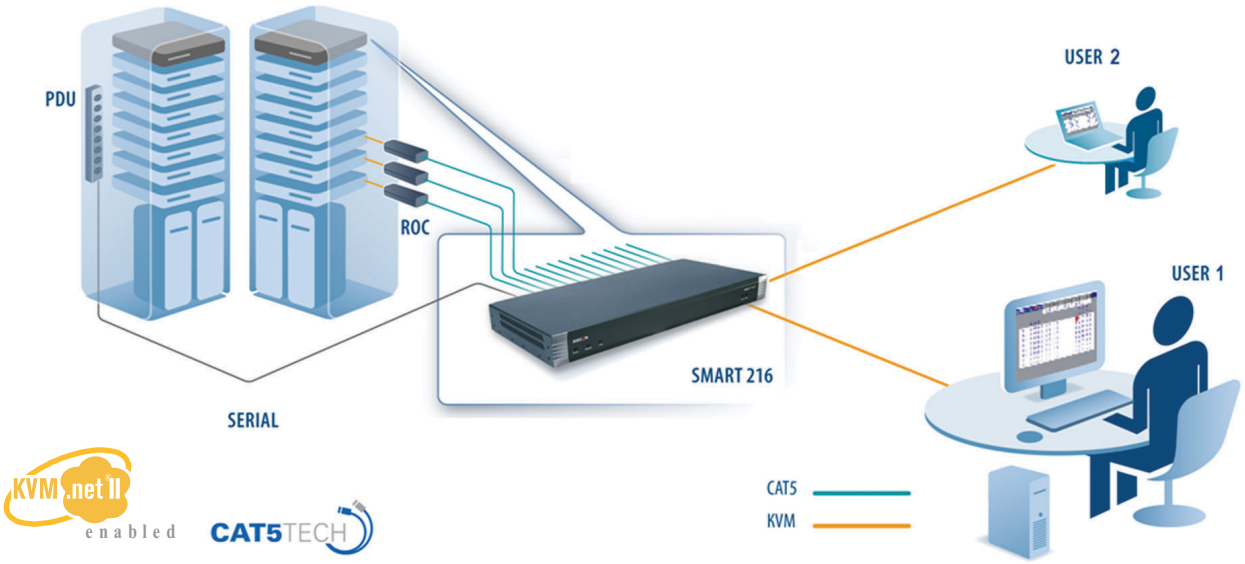

KVM.net II enabled

CAT5TECH

Technical Specifications

Operating systems for servers	Windows, Novell, Linux, SUN Solaris
Operating system for configuration computer	Windows 2000 or higher with IE 6.0 or higher or any contemporary web browser
Resolution	1600 x 1200 @ 85Hz
Switch to server distance	Up to 30 m / 100 ft
System cable	CAT5 UTP / FTP Solid Wire 2 x 4 x 24 AWG
Connection type	2 x Local KVM Connection - Screen HDD15, Keyboard/Mouse - 2 x USB Ethernet - RJ45 - 10 / 100 Mbit/sec autosensing (for configuration) Serial - RJ45 Servers - RJ45 x 16 ports for the Smart 216 and x 32 ports for the Smart 232
Product weight	2.343 Kg / 5.165 lbs
Shipping weight	3.6 Kg / 7.936 lbs
Dimensions	44 x 270 x 431mm / 1.7" x 10.6" x 17" (H x D x W)
Power	100 - 240 VAC 50 / 60 Hz
Warranty	3 years
Operating temperature	0°C to 40°C / 32°F to 104°F Storage
temperature	-40°C to 70°C / -40°F to 158°F
Humidity	80% non-condensing relative humidity

	ROC PS/2	ROC USB
Connection	VGA - HDD15 KM - MiniDin6 System - RJ45	VGA - HDD15 KM - USB System - RJ45
Power supply	From keyboard port	From USB port
Product dimensions	65 x 25 x 25mm / 0.21 x 0.08 x 0.08 in	
Package dimensions	225 x 150 x 52mm / 8.7 x 5.9 x 2.05 in	
Product weight	100 g / 0.20 lbs	
Shipping weight	172 g / 0.38 lbs	

Ordering and Shipping Information

Product	Part	UPC Code
Smart 216	0SU22090	654518209914
Smart 232	0SU22091	654518209921
ROC PS/2	0SU51078	654518209358
ROC USB	0SU51079	654518209365

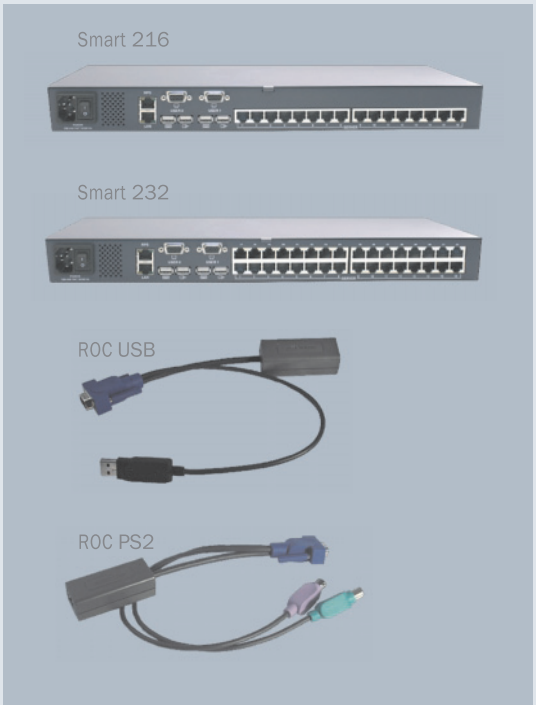

MINICOM advanced systems

www.minicom.com

International HQ
Jerusalem, Israel
T: +972 2 535 9666
F: +972 2 535 9693
minicom@minicom.com

North American HQ
New Jersey, USA
T: +888 486 2154
T: +908 486 2100
F: +908 486 7788
info.usa@minicom.com

European HQ
Dübendorf, Switzerland
T: +41 44 823 8000
F: +41 44 823 8005
info.minicom-europe@minicom.com

Beijing, China
T: +86 10 8586 0620
F: +86 10 8586 8815 and
info.china@minicom.com

Rome, Italy
T: +39 06 820 97 902
F: +39 06 820 97 903
info.italy@minicom.com

Kiel, Germany
T: +49 431 668 7933
F: +49 431 668 7934
info.minicom-germany@minicom.com

Vincennes, France
T: +33 1 49 57 00 00
F: +33 1 49 57 00 00
info.france@minicom.com

United Kingdom
T: +44 121 288 0608
info.uk@minicom.com

5DO20118